

SWE 08B

SWE 08B MINI-KOTRÓ



SUNWARD INTELLIGENT EQUIPMENT CO.,LTD.

Add: Sunward Intelligent Industrial Park, Xingsha, Changsha, 410100, China.
Tel: (0086-731) 83572 828 E-mail: international@sunward.com.cn
Web: www.sunward.com.cn

SUNWARD EUROPE HEAVY INDUSTRY N.V

Add:Nijvenrheidsark 3,3580
Beringen,Belgium
Tel:(0032-011)434666
E_mail:eu@sunward.cc

Please read the maunal book and maintenance book before operation, changes are periodically added to the information, and Sunward may change the products or services described in this book at any time without announcement. All rights of this manual book reserve to Sunward. SUNWARD Internal Use Only

SWE EN 2017-8

Engine netpower:7.2kW
Machine weight:1010kg

SWE08B is a compact mini-sized excavator applied in narrow spaces, featuring high reliability, easy operations, and excellent protection for the driver. It will become your excellent partner.



Yanmar engine

Trustworthy on compact equipment, this engine features low noise, low vibration, and easy maintenances for main parts.



Fops/Tops

The standard tiltable/foldable protection cage conforms to the EU Fops/Tops safety certification requirements to safeguard the driver. This protection cage features better trafficability after being folded.



Telescopic chassis

Controlled by simple single joystick, the chassis width can be retracted to 750mm to adapt to narrow spaces. On the contrary, the chassis width can be extended to 1,000mm to improve the stability by 15% and even allow the use of hydraulic breaking hammer.

With simple rotating shaft, the dozer blade is capable of rapid folding.



With the chassis retracted to 750mm, the SWE08B can drive through most narrow door openings successfully for operations indoors.



Quick change device

It can allow the removal and installation of various buckets and attachments in a time-saving and rapid manner.



Working device pipeline

The transitional connection is applied for all working pipelines at the boom root to ease repairs and replacement and all exposed pipelines vulnerable to collision or scratch are protected by steel sleeves to effectively prolong the life.



Hoisting points

3 hoisting points are provided for direct hoisting and transport by a crane, featuring high safety and simplicity.

Pilot control for working device

The hydraulic pilot control is firstly applied for the working device, featuring better accuracy and smoothness.



High-grade aluminum pedal plate

Concealed self-retracting seat belt

High-grade aluminum pedal plate

Large maintenance space

The tiltable engine hood allows the exposure of most engine area to ease the repairs.



- A

Water tank filler port
- B

Air filter
- C

Alternator
- D

Starter motor
- E

Expansion tank
- F

Oil suction filter element
- G

Oil return filter element
- H

Battery
- I


pressure measurement
- J

Fuel filter
- K

Engine oil filler port
- L

Fuel filler port



Centralized grease injection

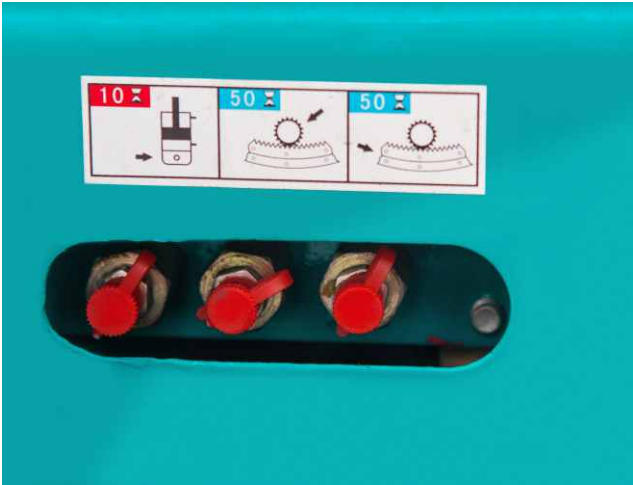

External centralized pressure measurement connector




SWE08B Technical Parameters			
Type of cab		Open cab	
Bucket capacity,std.		m³	0.022
Bucket width		mm	320
Machine weight		kg	1010
Dimensions	Overall length	mm	2640
	Overall height	mm	2250
	Overall width	mm	750
	Ground clearance	mm	131
Engine	Brand	Yanmar	
	Model	2TNV70-PSU	
	Displacement	L	0.57
	Output	kW/rpm	7.2/2400
Working ranges	Max cutting height	mm	3085
	Max loading height	mm	2305
	Max digging depth	mm	1825
	Max digging reach	mm	3180
	Boom swing angle (left/right)	°	73/53
	Front swing radius	mm	1221
	Tail swing radius	mm	750
	Max digging force (Arm)	kN	5.8
	Max digging force (Bucket)	kN	9.4
Track	Type	Rubber crawler	
	Rubber shoe Width	mm	180
Undercarrige	Track Length	mm	1299
	Length to center of Rollers	mm	975
	Lenhth to center of track	mm	560/820
	Travelling spaeed (High/Low)	km/h	2.9/1.5
	Gradeability	deg	30
Swing speed		rpm	8.2
Ground pressure		kpa	24.5
Dozer size	Width	mm	750/1000
	Height	mm	190
	Lifting capacity (Height/Depth)	mm	225/225
Hydraulic pumps	Type	3 Gear pump	
	Flow rate	L/min	3*9.6
	Hydraulic pressure	Mpa	2*16
Swing motor		Cycloidal motor	
Travel motor		2-speed ram motor	
Fuel tank capacity		L	10
Hydraulic oil tank capacity		L	9.5

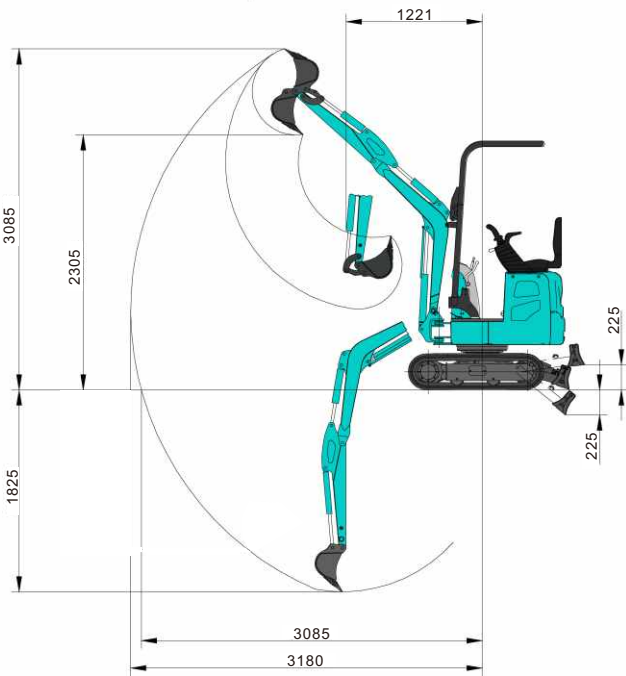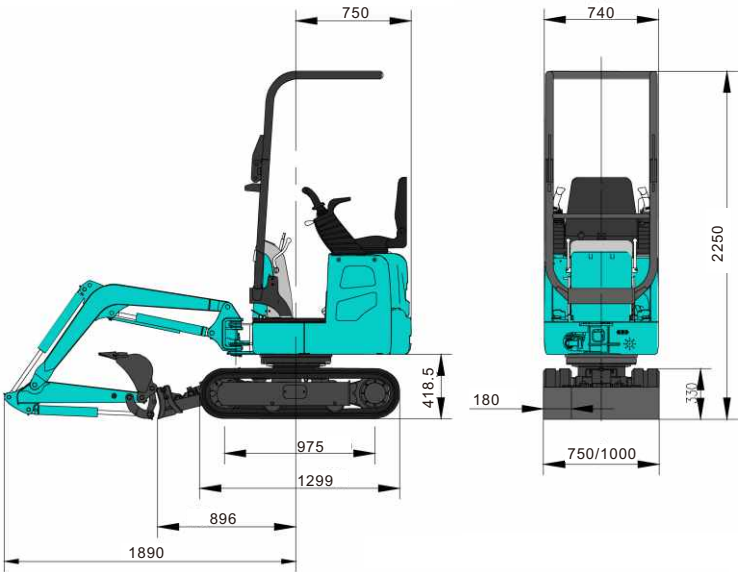

Load Capability:

Lift Point Height	Lift Point Radius(MAX)		Lift Point Radius(2.0m)		Lift Point Radius(1.0m)	
	Over-front(kg)	Over-side(kg)	Over-front(kg)	Over-side(kg)	Over-front(kg)	Over-side(kg)
2.0m	119.60*	86.6	129.20*	107.30	-	-
1.0m	157.90*	61.9	100.50*	94.90	416.40*	264.00
0.0m	196.20*	70.1	224.90*	86.60	445.10*	202.20
-1.0m	205.80*	127.9	-	-	287.10*	243.40

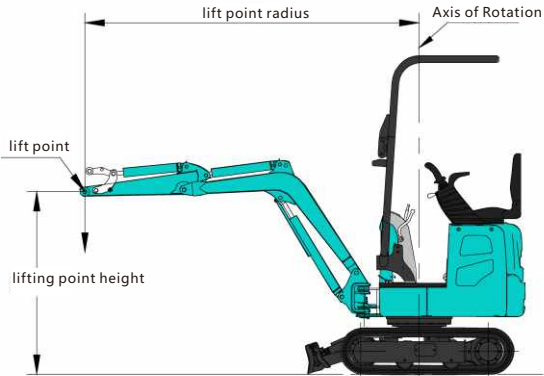

- Notes:
- 1、 Load with * is limited by hydraulic capacity and based on ISO 10567. Rated loads do not exceed 87% of hydraulic capacity.
 - 2、 Load without * is limited by tipping load and based on ISO 10567. Rated loads do not exceed 75% of tipping capacity.
 - 3、 The excavator bucket, hook, sling and other lifting accessories are not included in this table.